



KEY FEATURES

- *Universal input
- *Built-in EMI filter
- *Optional constant current charger
- *Optional $\pm 12\text{VDC}/\pm 24\text{VDC}/\pm 48\text{VDC}$ input
- *Optional output cable and plug
- *Optional constant current change (for single output)

APPLICATIONS

- *Telecommunications
- *Computer peripherals/ Game machines
- *Test & industrial equipments
- *Medical instruments/ Business machines


ELECTRICAL SPECIFICATIONS

INPUT

- *Input range-----90~264 VAC, universal
- *Frequency-----47~63Hz
- *Inrush current-----40A typical, Cold start @25°C, 115VAC
- *Efficiency-----65%~80% typical at full load
- *EMI filter-----FCC Class B conducted, CISPR 22 Class B conducted, EN55022 class B Conducted
- *Line regulation----- +/- 0.5% typical

OUTPUT

- *Maximum power----25W (Refer next page)
- *Hold-up time -----10ms typical at full load and 115 VAC nominal line
- *Overload protection-Short circuit protection
- *Overvoltage protection -----Main output 20% to 40% above nominal output
- *Ripple/Noise ----- +/- 1% Max. @full load (Optional +/- 0.5% per inquiry)

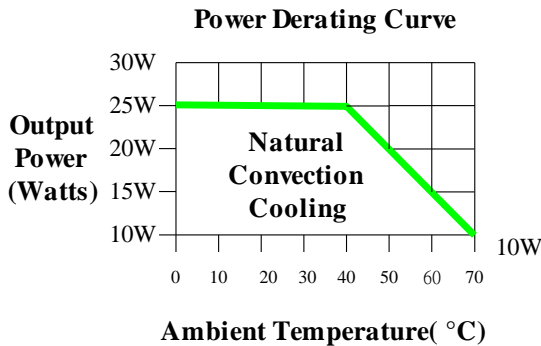

EMI & EMC

- *FCC part 15, Class B
- *CISPR 22 / EN55022, Class B
- *VCCI, Class 2
- *CE, EN 61000-3-2(Class A) and -3; EN 61000-4-2, -3, -4, -5, -6 and -11

SAFETY APPROVAL

- *UL / cUL 60950
- *Optional CSA 22.2, LEVEL 3(COMPLY WITH)
- *TUV EN60950
- *Optional UL 2601(EMI Class A) (COMPLY WITH)

ENVIRONMENTAL

- *Operating temperature : 0 to 40°C ambient; derate each output at 2% per degree from 40°C to 70°C
- *Humidity: Operating; non-condensing, 5% to 95%
- *Vibration : 10~55 Hz at 1G 3 minutes period, 30 minutes along X, Y and Z axis
- *Storage temperature: -40 to 85°C
- *Temperature coefficient: +/- 0.05% per degree C
- *MTBF demonstrated: >100,000 hours at full load and 25°C ambient conditions

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	MAXIMUM OUTPUT CURRENT	PEAK OUTPUT CURRENT(NOTE1)	MINIMUM OUTPUT CURRENT	TOTAL REGULATION(NOTE3)	RIPPLE & NOISE %P-P(NOTE2)	PEAK OUTPUT POWER(NOTE1)
SINGLE OUTPUT MODEL SELECTION CHART								
PPS25A-10	+5V	Fixed	5A	7A	0A	±5%	±1%	35W Typical
PPS25A-11	+12V	Fixed	2.1A	2.9A	0A	±5%	±1%	35W Typical
PPS25A-12	+15V	Fixed	1.7A	2.4A	0A	±5%	±1%	35W Typical
PPS25A-13	+24V	Fixed	1.05A	1.5A	0A	±5%	±1%	35W Typical
PPS25A-14	+48V	Fixed	0.52A	0.7A	0A	±5%	±1%	35W Typical
PPS25A-15	+36V	Fixed	0.7A	1A	0A	±5%	±1%	35W Typical
PPS25A-17	+3.3V	Fixed	5A	7A	0A	±5%	±1.5%	25W Typical

DUAL OUTPUT MODEL SELECTION CHART

PPS25A-20	+5 V	Fixed	2.5A	3.5A	0.25A	±5%	±1%	35W Typical
	+12V	Fixed	1.1A	1.5A	0.11A	±5%	±1%	
PPS25A-21	+5 V	Fixed	2.5A	3.5A	0.25A	±5%	±1%	35W Typical
	+48V	Fixed	0.3A	0.4A	0.03A	±5%	±1%	
PPS25A-22	+5 V	Fixed	2.5A	3.5A	0.25A	±5%	±1%	35W Typical
	- 5V	Fixed	2.5A	3.5A	0.25A	±10%	±1%	
PPS25A-23	+12V	Fixed	1.1A	1.5A	0.11A	±5%	±1%	35W Typical
	- 12V	Fixed	1.1A	1.5A	0.11A	±10%	±1%	
PPS25A-24	+15V	Fixed	0.9A	1.3A	0.09A	±5%	±1%	35W Typical
	- 15V	Fixed	0.9A	1.3A	0.09A	±10%	±1%	
PPS25A-25	+5V	Fixed	2.5A	3.5A	0.25A	±5%	±1%	35W Typical
	+24V	Fixed	0.6A	0.8A	0.06A	±5%	±1%	
PPS25A-26	+3.3V	Fixed	3.5A	4.9A	0.35A	±5%	±1.5%	30W Typical
	+12V	Fixed	1.2A	1.5A	0.12A	±5%	±1%	
PPS25A-27	+3.3 V	Fixed	3.5A	4.9A	0.35A	±5%	±1.5%	30W Typical
	+24V	Fixed	0.6A	0.8A	0.06A	±5%	±1%	
PPS25A-28	+3.3V	Fixed	3.5A	4.5A	0.35A	±5%	±1.5%	30W Typical
	+5V	Fixed	2.7A	3.5A	0.27A	±5%	±1%	

TRIPLE OUTPUT MODEL SELECTION CHART

PPS25A-30	+ 5V	Fixed	2.5A	3.5A	0.25A	±5%	±1%	35W Typical
	+12V	Fixed	1A	1.4A	0.1A	±5%	±1%	
	- 5 V	Fixed	0.2A	0.3A	0.02A	±10%	±1%	
PPS25A-31	+ 5V	Fixed	2.5A	3.5A	0.25A	±5%	±1%	35W Typical
	+12V	Fixed	1A	1.4A	0.1A	±5%	±1%	
	-12V	Fixed	0.1A	0.1A	0.01A	±10%	±1%	
PPS25A-32	+ 5V	Fixed	2.5A	3.5A	0.25A	±5%	±1%	35W Typical
	+15V	Fixed	0.8A	1.1A	0.08A	±5%	±1%	
	-15V	Fixed	0.1A	0.1A	0.01A	±10%	±1%	
PPS25A-33	+ 5V	Fixed	3.3A	4.6A	0.33A	±5%	±1%	35W Typical
	+15V	Fixed	0.5A	0.7A	0.05A	±5%	±1%	
	- 5 V	Fixed	0.3A	0.4A	0.03A	±10%	±1%	
PPS25A-34	+ 5V	Fixed	3.3A	4.6A	0.33A	±5%	±1%	35W Typical
	+15V	Fixed	0.5A	0.7A	0.05A	±5%	±1%	
	-12V	Fixed	0.2A	0.3A	0.02A	±10%	±1%	
PPS25A-35	+ 5 V	Fixed	3.3A	4.6A	0.33A	±5%	±1%	35W Typical
	+24V	Fixed	0.3A	0.4A	0.03A	±5%	±1%	
	-12V	Fixed	0.3A	0.4A	0.03A	±10%	±1%	
PPS25A-36	+ 5V	Fixed	2A	2.8A	0.2A	±5%	±1%	35W Typical
	+12V	Fixed	1A	1.4A	0.1A	±5%	±1%	
	- 12V	Fixed	0.3A	0.4A	0.03A	±10%	±1%	
PPS25A-37	+ 5V	Fixed	2A	2.8A	0.2A	±5%	±1%	35W Typical
	+12V	Fixed	1A	1.4A	0.1A	±5%	±1%	
	+24 V	Fixed	0.2A	0.3A	0.02A	±10%	±1%	

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	MAXIMUM OUTPUT CURRENT	PEAK OUTPUT CURRENT(NOTE1)	MINIMUM OUTPUT CURRENT	TOTAL REGULATION(NOTE3)	RIPPLE & NOISE %P-P(NOTE2)	PEAK OUTPUT POWER(NOTE1)
-------	----------------	------------------	------------------------	----------------------------	------------------------	-------------------------	----------------------------	--------------------------

TRIPLE OUTPUT MODEL SELECTION CHART

PPS25A-38	+ 5V	Fixed	2A	2.8A	0.2A	±5%	±1%	35W Typical
	+12V	Fixed	1A	1.4A	0.1A	±5%	±1%	
	+48V	Fixed	0.1A	0.1A	0.01A	±10%	±1%	
PPS25A-39	+3.3V	Fixed	1.5A	2.1A	0.15A	±5%	±1.5%	30W Typical
	+ 5V	Fixed	2A	2.8A	0.2A	±5%	±1%	
	+12V	Fixed	1A	1.4A	0.1A	±10%	±1%	

- NOTES:** 1) Peak loads for lasting <30 seconds with a maximum 10% duty cycle are acceptable. Please contact us if need special peak load.
 2) Maximum peak to peak noise expressed as a percentage of output voltage, 20MHz bandwidth, 0.1µ F and 47µ F Cap. on outputs.
 3) Loading test conditions are set for all outputs at minimum, middle and maximum of loads. Special cross loading requirement is welcomed.
 4) Detailed engineering specification of each model is available for inquiry.
 5) Special output voltage/current inquiry is welcomed.
 6) Specifications subject to change without notice.
 7) 25% derated if 24 VDC input version; 50% derated if 12 VDC input version.
 8) Above data is measured at the output plug/connector of 1M long cable. Please contact us if need special cable and connector.

MECHANICAL DRAWING

